


# CONSTANT SPEED SINGLE SPLIT DELUXE (COOLING) CRS SERIES



## REFRIGERANT PIPE LENGTH

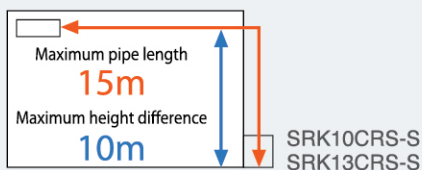

SRC10CRS-S



SRC13CRS-S

## FUNCTIONS

### ENERGY SAVING



### AIR FLOW



### CLEAN OPERATION & FILTER



### COMFORT & CONVENIENCE



### OTHERS



## SPECIFICATIONS

MODEL		CRS SERIES			
		INDOOR UNIT		SRK10CRS-S	SRK13CRS-S
ITEM	OUTDOOR UNIT			SRC10CRS-S	SRC13CRS-S
Power Source	1Phase, 220 / 230V, 50Hz				
Capacity	kW			2.70	3.60
	BTU/h			9,213	12,283
Input	W			740	1,000
EER	BTU/hW			12.45	12.28
Current	A			3.5 / 3.3	4.7 / 4.5
Exterior dimensions (HxWxD)	Indoor unit	mm	268 × 790 × 213 (224 (S1, S2))		
	Outdoor unit	mm	540 × 780 (+62) × 290		595 × 780 (+62) × 290
Net weight	Indoor unit	kg	9.5		
	Outdoor unit	kg	30.0		34.0
Air Flow	Indoor unit	m <sup>3</sup> /min	10		10
	Outdoor unit	m <sup>3</sup> /min	26.5		32
Compressor motor	kW			0.660	1.090
Refrigerant	R410A				
Refrigerant piping	Liquid line	mm	6.35		
	Gas line	mm	9.52		12.70
Connecting wiring	1.5 mm <sup>2</sup> × 3 cores (Including earth cable)				
Connecting method	Terminal block (Screw fixing type)				