



CONSTANT SPEED SINGLE SPLIT STANDARD (COOLING) CS SERIES



REFRIGERANT PIPE LENGTH

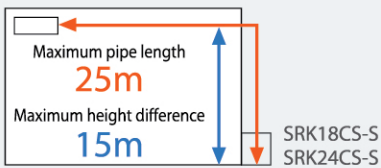

SRK18CS-S
SRC24CS-S

FUNCTIONS

ENERGY SAVING



AIR FLOW



CLEAN OPERATION & FILTER



COMFORT & CONVENIENCE



OTHERS



*24-HOUR ION for SRK24CS-S only

SPECIFICATIONS

ITEM	MODEL	CS SERIES		
		INDOOR UNIT OUTDOOR UNIT	SRK18CS-S SRC18CS-S	SRK24CS-S SRC24CS-S
Power source			1 Phase, 220 / 230V, 50Hz	1 Phase, 220 / 230V, 50Hz
Capacity	Cooling	kW	5.10	7.20
		BTU/h	17,401	24,566
	Heating	kW	--	--
		BTU/h	--	--
Input	Cooling	kW	1.600	2.200
		kW	--	--
EER	Cooling	BTU/hW	10.88	11.16
		BTU/hW	--	--
COP	Cooling	W/W	3.19	3.27
		W/W	--	--
Current	Cooling	A	7.4 / 7.1	10.6 / 10.1
		A	--	--
Exterior dimensions (H x W x D)	Indoor unit	mm	309 x 890 x 251	339 x 1197 x 262
	outdoor unit	mm	640 x 850 (+65) x 290	640 x 850 (+65) x 290
Net weight	Indoor	kg	12.0	16.0
	outdoor	kg	39.0	46.0
Air Flow (Cooling)	Indoor unit	m ³ /min	12.8	22.0
	outdoor unit	m ³ /min	38.0	38.0
Compressor Motor		kW	1.27	1.825
Refrigerant			R410A	R410A
Refrigerant piping	Liquid line	mm	6.35	6.35
	Gas line	mm	15.88	15.88
Connecting wiring	Power cord (Size x Core number)		2.5 mm ² x 3 cores (Including earth cable)	2.5 mm ² x 3 cores (Including earth cable)
	Out-In Interconnect (Size x Core no)		2.5 mm ² x 4 cores (Including earth cable)	2.5 mm ² x 4 cores (Including earth cable)
Connect method			Terminal Block (Screw fixing type)	Terminal Block (Screw fixing type)