


CONSTANT SPEED SINGLE SPLIT DELUXE (COOLING) CSS SERIES



REFRIGERANT PIPE LENGTH

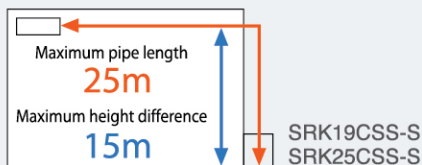

SRC19CSS-S



SRC25CSS-S

FUNCTIONS

ENERGY SAVING



AIR FLOW



CLEAN OPERATION & FILTER



COMFORT & CONVENIENCE



OTHERS



SPECIFICATIONS

ITEM	MODEL	CSS SERIES			
		INDOOR UNIT	SRK19CSS-S	SRK25CSS-S	
		OUTDOOR UNIT	SRC19CSS-S	SRC25CSS-S	
Power Source			1Phase, 220 / 230V, 50Hz		
Capacity		kW	5.40	7.40	
		BTU/h	18,425	25,249	
Input		kW	1.46	2.065	
EER		BTU/hW	12.62	12.21	
Current		A	6.9 / 6.7	9.8 / 9.4	
Exterior dimensions (H x W x D)	Indoor unit	mm	339 x 1,197 x 262		
	Outdoor unit	mm	640 x 850 (+65) x 290	750 x 880 (+88) x 340	
Net weight	Indoor unit	kg	16.0	16.0	
	Outdoor unit	kg	41.0	57.0	
Air Flow	Indoor unit	m ³ /min	16.0	22.0	
	Outdoor unit	m ³ /min	38.0	60.0	
Compressor motor		kW	1.27	1.825	
Refrigerant			R410A		
Refrigerant piping	Liquid line	mm	6.35		
	Gas line	mm	15.88		
Connecting wiring			2.5 mm ² x 4 cores (Including earth cable)		
Connecting method			Terminal block (Screw fixing type)		